



Little Giant Mk I Double Couplers

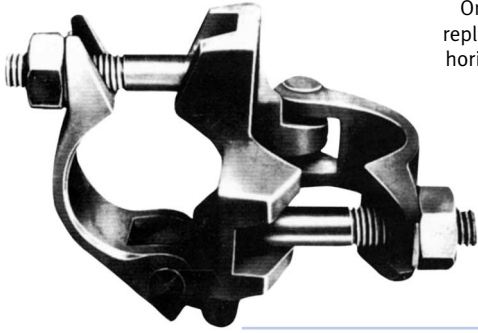


One piece design, easily replaceable bolts, connects horizontal or ledger tubes to standards.

Little Giant Mk I Swivel Coupler

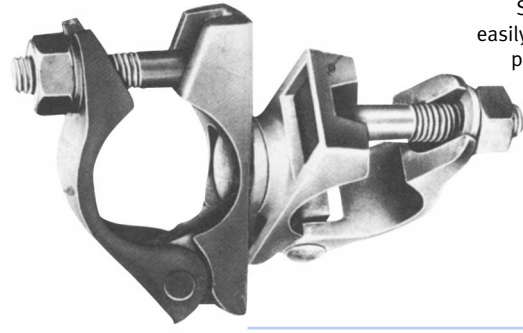


Single unit design, easily replaceable bolts, principally used for bracing and allowing tubes to be connected at any angle.

Little Giant Mk IV Double Coupler

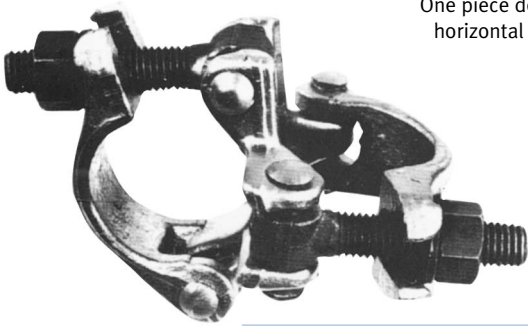


One piece design, connects horizontal or ledger tubes to standards .

Little Giant Mk IV Swivel Coupler

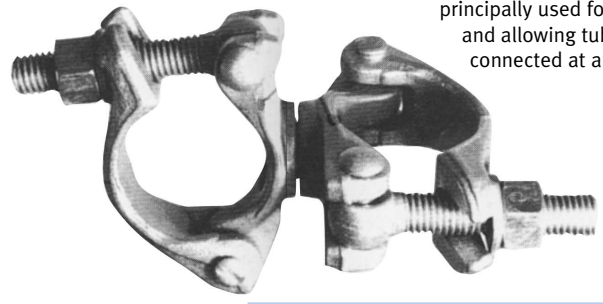


Single unit design, principally used for bracing and allowing tubes to be connected at any angle.

Little Giant Putlog Coupler - Double Lug

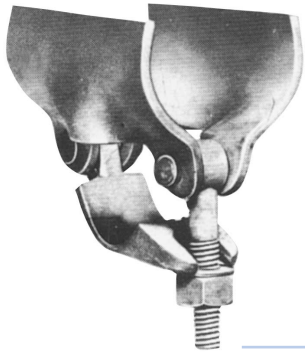


Similarly used as the Mark II for connecting putlogs or transoms to ledger tubes, this design leaves the putlog/tube completely unobstructed so that the scaffold boards lay flat.

Little Giant Sleeve Coupler

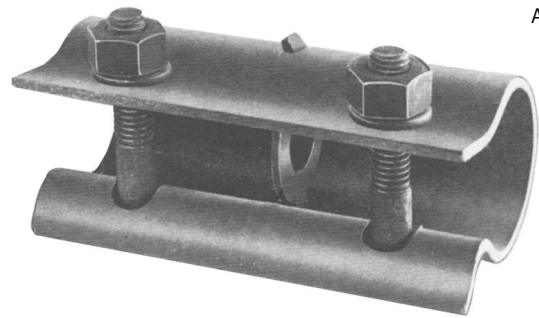


A fitting designed for external joining of two tubes end to end.

Flat Back Coupler

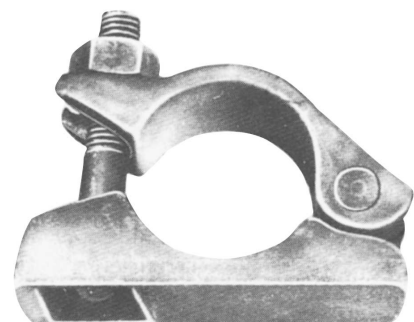


Designed as Half Double Coupler with flat back for welding.

Base Plate (code 108)

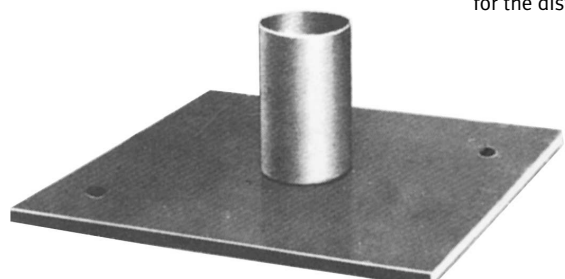


Used at the base of all standards for the distribution of load.

Little Giant Mk III Double Coupler

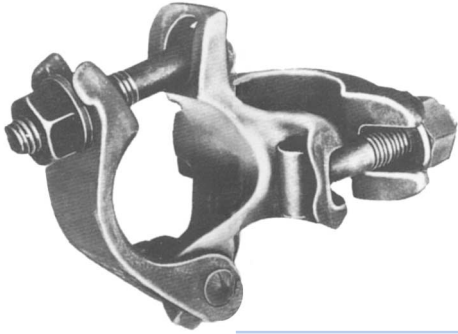

One piece design, easily replaceable bolts, connects horizontal or ledger tubes to standards.

Little Giant Mk III Swivel Coupler

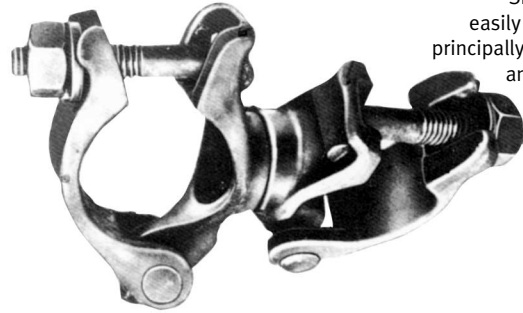


Single unit design, easily replaceable bolts, principally used for bracing and allowing tubes to be connected at any angle.

Little Gem Swivel Coupler




Single unit design, easily replaceable bolts, principally used for bracing and allowing tubes to be connected at any angle.

Little Gem Double Coupler

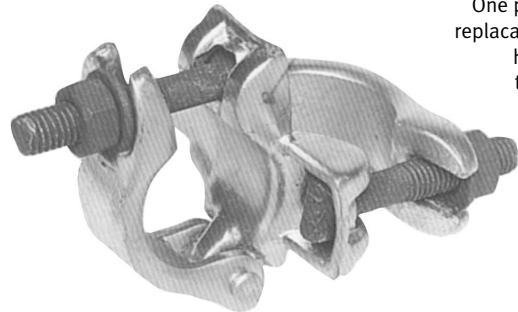


One piece design, easily replaceable bolts, connects horizontal or ledger tubes to standards.

Half Swivel Coupler

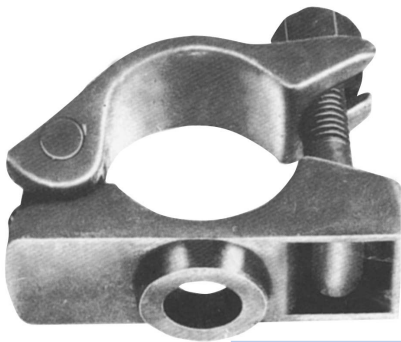


As its name implies, this is an unriveted half of a Swivel Coupler.

Drop Forged Split joint Pin

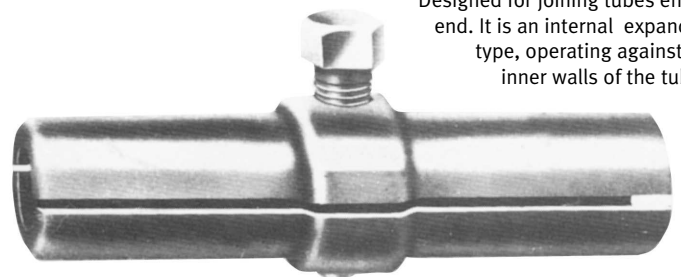


Designed for joining tubes end to end. It is an internal expanding type, operating against the inner walls of the tubes.

Profiled Coupler

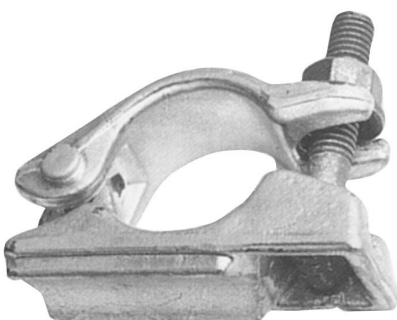


Designed on the same style as the Half Swivel Coupler, but Body Profiled for welding onto tube.

Side-by-side Coupler (Without Chair)

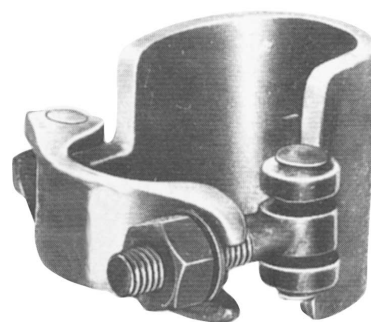


A fitting to lap two tubes in parallel, the one bolt fixing firmly securing the tubes together in direct contact.

Rafter Coupler

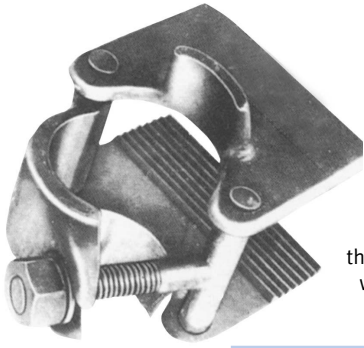


Designed for securing timber to tube: is particularly useful in the construction of temporary roofs, sheds, hoardings, grandstands, formwork, etc.
Rafter Couplers are used extensively in both film and television studios for set construction. The vice-like grip of this fitting holds timbers in position without the use of nails or screws.

Little Giant Mk II Putlog Coupler - Single Lug (Wrapover)




Single Unit design, used for connecting putlogs or transoms to ledger tubes.

Dual Clamps

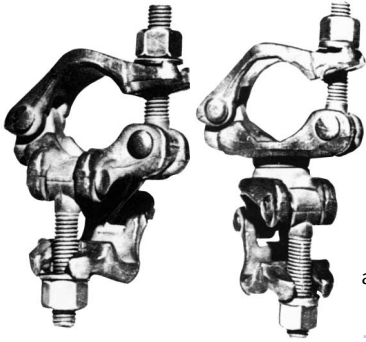

The fittings are unique in that they secure tubes of 1.90" (48.3mm) down to 1.50" (38mm) on both sides. Supplied in two types: Right Angle (90°) (rigid). Swivel (360°) (adjustable). Dual Double Coupler - one piece design for connecting horizontal or ledger tubes to standards. Dual Swivel Coupler - one piece design for attaching bracing tubes at any angle.

Beam Clamp

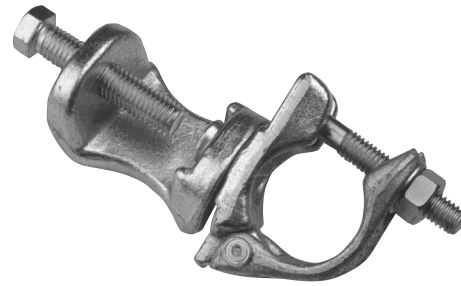

Totally drop forged with swivel facility.


Swingover Spanners




Specially heat treated, high carbon steel boxes (all rust proofed).

		WEIGHT		
		lbs.	kg.	
Single Ended	Across Flat	21mm	1.50	0.68
"	"	23mm	1.50	0.68

R.S.J. Coupler



Solid one piece drop forged steel fittings: used for securing 48.3mm (1.90") OD tubes to structural steel members.



Crocodile Scaffolding

CROCODILE SCAFFOLDING (ENGLAND) Ltd • Crocodile House,
Telephone: +44 (0)1902 826 82
E-mail: Burtions@CrocodileScaffolding.com

Crocodile Drop Forged Scaffold Fittings

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Little Giant Mk I & Giant Double Couplers						
33.7	48.3	1 ¹¹ / ₃₂	1 ²⁹ / ₃₂	1 x 2	2.218	1.007
42.4	48.3	1 ¹¹ / ₁₆	1 ²⁹ / ₃₂	1 ⁵ / ₈ x 2	2.531	1.149
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 x 2	2.812	1.277
48.3	60.3	1 ²⁹ / ₃₂	2 ³ / ₈	2 x 2 ³ / ₈	4.187	1.901
48.3	63.5	1 ²⁹ / ₃₂	2 ¹ / ₂	2 x 2 ¹ / ₂	4.062	1.844
48.3	76.1	1 ²⁹ / ₃₂	3	2 x 3	4.50	2.043
48.3	88.9	1 ²⁹ / ₃₂	3 ¹ / ₂	2 x 3 ¹ / ₂	5.125	2.327
60.3	60.3	1 ²⁹ / ₃₂	2 ³ / ₈	2 ³ / ₈ x 2 ³ / ₈	5.562	2.525

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Little Giant Mk I & Giant Swivel Couplers						
33.7	33.7	1 ¹¹ / ₃₂	1 ¹¹ / ₃₂	1 x 1	1.625	0.738
33.7	48.3	1 ¹¹ / ₃₂	1 ²⁹ / ₃₂	1 x 2	2.375	1.078
42.4	42.4	1 ¹¹ / ₁₆	1 ¹¹ / ₁₆	1 ⁵ / ₈ x 1 ⁵ / ₈	2.812	1.277
42.4	48.3	1 ¹¹ / ₁₆	1 ²⁹ / ₃₂	1 ⁵ / ₈ x 2	3.125	1.419
42.4	60.3	1 ¹¹ / ₁₆	2 ³ / ₈	1 ⁵ / ₈ x 2 ³ / ₈	4.625	2.100
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 x 2	3.25	1.476
48.3	60.3	1 ²⁹ / ₃₂	2 ³ / ₈	2 x 2 ³ / ₈	4.75	2.157
48.3	63.5	1 ²⁹ / ₃₂	2 ¹ / ₂	2 x 2 ¹ / ₂	5.00	2.270
48.3	76.1	1 ²⁹ / ₃₂	3	2 x 3	4.68	2.125
48.3	88.9	1 ²⁹ / ₃₂	3 ¹ / ₂	2 x 3 ¹ / ₂	6.00	2.724
60.3	60.3	2 ³ / ₈	2 ³ / ₈	2 ³ / ₈ x 2 ³ / ₈	6.312	2.866
60.3	76.1	2 ³ / ₈	3	2 ³ / ₈ x 3	6.187	2.809
63.5	63.5	2 ¹ / ₂	2 ¹ / ₂	2 ¹ / ₂ x 2 ¹ / ₂	6.25	2.838
76.1	76.1	3	3	3 x 3	6.187	2.809
88.9	88.9	3 ¹ / ₂	3 ¹ / ₂	3 ¹ / ₂ x 3 ¹ / ₂	8.687	3.944

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Mk3 Double	2.375	1.078

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Mk3 Swivel	2.625	1.19

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Mk4 Double	2.375	1.08

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Mk4 Swivel	2.75	1.25

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Double	2.25	1.02

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	Swivel	2.5	1.16

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Half Swivel Couplers						
33.7	-	1 ¹¹ / ₃₂	-	With Hole	0.750	0.341
42.4	-	1 ¹¹ / ₁₆	-	Without Hole	1.500	0.681
42.4	-	1 ¹¹ / ₁₆	-	With Hole	1.437	0.652
48.3	-	1 ²⁹ / ₃₂	-	Without Hole	1.781	0.809
48.3	-	1 ²⁹ / ₃₂	-	With Hole	1.750	0.795
60.3	-	2 ³ / ₈	-	Without Hole	3.062	1.390
60.3	-	2 ³ / ₈	-	With Hole	3.000	1.362
63.5	-	2 ¹ / ₂	-	Without Hole	3.062	1.390
63.5	-	2 ¹ / ₂	-	With Hole	3.000	1.362
76.1	-	3	-	Without Hole	2.875	1.305
76.1	-	3	-	With Hole	2.812	1.277
88.9	-	3 ¹ / ₂	-	Without Hole	4.407	2.001
88.9	-	3 ¹ / ₂	-	With Hole	4.375	1.986

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
---------------	---	---------------------	---	-------------------	------------	----

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Putlog Couplers						
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 Putlog	1.812	0.823
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 Wrapover	1.437	0.652

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Sleeve Couplers						
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2" Sleeve	2.50	1.135

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Split Joint Pins						
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 S.J.P. N/T	2.500	1.135

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Flat Back Couplers						
48.3	-	1 ²⁹ / ₃₂	-	2 Flatback	1.750	0.795
76.1	-	-	-	3 Flatback	3.625	1.646

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Rafter Coupler						
50.8	48.3	2	1 ²⁹ / ₃₂	2 Timber	2.75	1.249

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Profiled Coupler						
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 Right Angle	1.562	0.709

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Side x Side Without Chair						
42.4	42.4	1 ⁵ / ₈	1 ⁵ / ₈	1 ⁵ / ₈ (without chair)	1.50	0.680
48.3	48.3	1 ²⁹ / ₃₂	1 ²⁹ / ₃₂	2 side by side (without chair)	2.25	1.022

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Dual Double Coupler						
48.3	48.3	1 ²⁹ / ₃₂ (1.90)	1 ²⁹ / ₃₂ (1.90)	Dual Double	3.125	1.419
and	and	and	and		3.25	1.475
38.00	38.00	1 ¹ / ₂	1 ¹ / ₂ (1.50")	(1.50")		

Metric A (mm)	B	Imperial A (inches)	B	Order Description	Weight lbs	kg
Dual Swivel Coupler						
48.3	48.3	1 ²⁹ / ₃₂ (1.90)	1 ²⁹ / ₃₂ (1.90)	Dual Swivel	3.625	1.645
and	and	and	and		3.85	1.748
38.00	38.00	1 ¹ / ₂ (1.50")	1 ¹ / ₂ (1.50")			

All products meet the applicable test requirements.

Nut Sizes The following are available to the customer's choice: Hexagonal 21mm, 22mm and 23mm Across Flats can be supplied.

Strength The Crocodile range of scaffold fittings has the extra strength of being drop forged from the finest of British steel to ensure a longer trouble free working life.

Finish Normally the Crocodile range of fittings are self colour and fitted with plated bolts but can be offered in a plated, galvanised or sherardized finish. Whilst every care has been taken to ensure that information given in this broadsheet is correct, Ralph Martindale Ltd must reserve the right to alter and revise this information and specification as and when they consider it necessary. This is in line with their policy of research and development. Many of our range are covered by Patents or Registered Design numbers. Customised fittings can also be supplied to customers' requirements. E&OE.

Scaffold Fittings

Strawberry Lane, Willenhall, West Midlands WV13 3RS, England

6 • Fax: +44 (0)1902 826 827

o.uk • www.crocodilescaffolding.co.uk



Cert No. QO5872
BS EN ISO 9002: 1994

